



Redes de Datos

Direccionamiento y Enrutamiento de Datos



Objectives

Network Layer Protocols

- Describe the purpose of the network layer in data communication.
- Explain why the IPv4 protocol requires other layers to provide reliability.
- Explain the role of the major header fields in the IPv4 and IPv6 packet.

Routing

- Explain how a host device uses routing tables to direct packets to itself, a local destination, or a default gateway.
- Compare a host routing table to a routing table in a router.

Addressing

Subnetting & VLSM

Supernetting


Network Layer in Communications

➤ The Network Layer

- End to End Transport processes
- Addressing end devices
- Encapsulation
- Routing
- De-encapsulating

➤ Network Layer Protocols


- IPv4
- IPv6

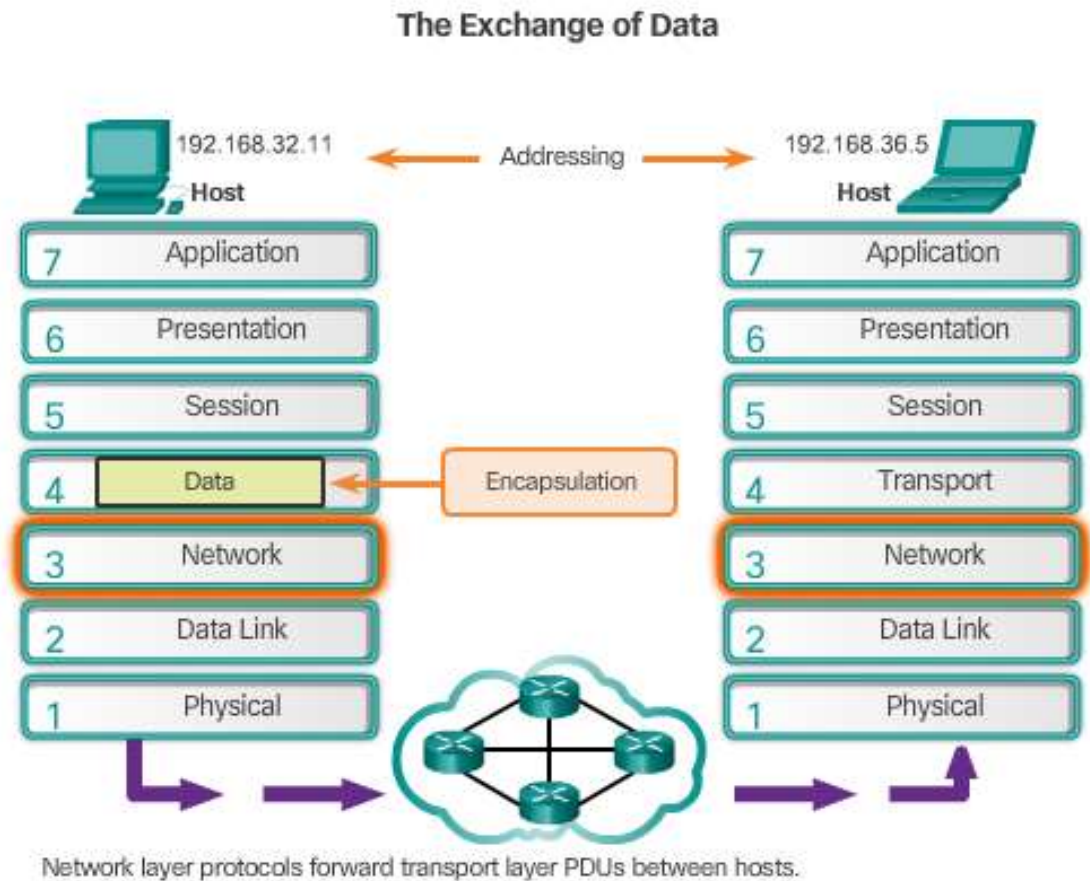

Network Layer Protocols

Characteristics of the IP Protocol


- Encapsulating IP
 - Segments are encapsulated into IP packets for transmission.
 - The network layer adds a header so packets can be routed to the destination.
- IP - Connectionless
 - Sender doesn't know if the receiver is listening or the message arrived on time.
 - Receiver doesn't know data is coming.
- IP – Best Effort Delivery
 - No guarantees of delivery are made.
- IP – Media Independent
 - IP can travel over different types of media.

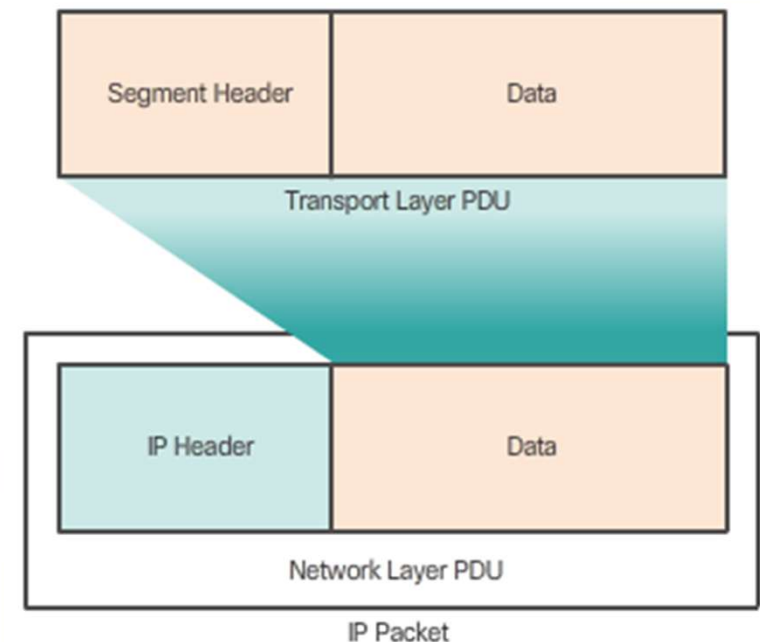

Network Layer Protocols

IPv4 Packet

IPv4 Packet Header

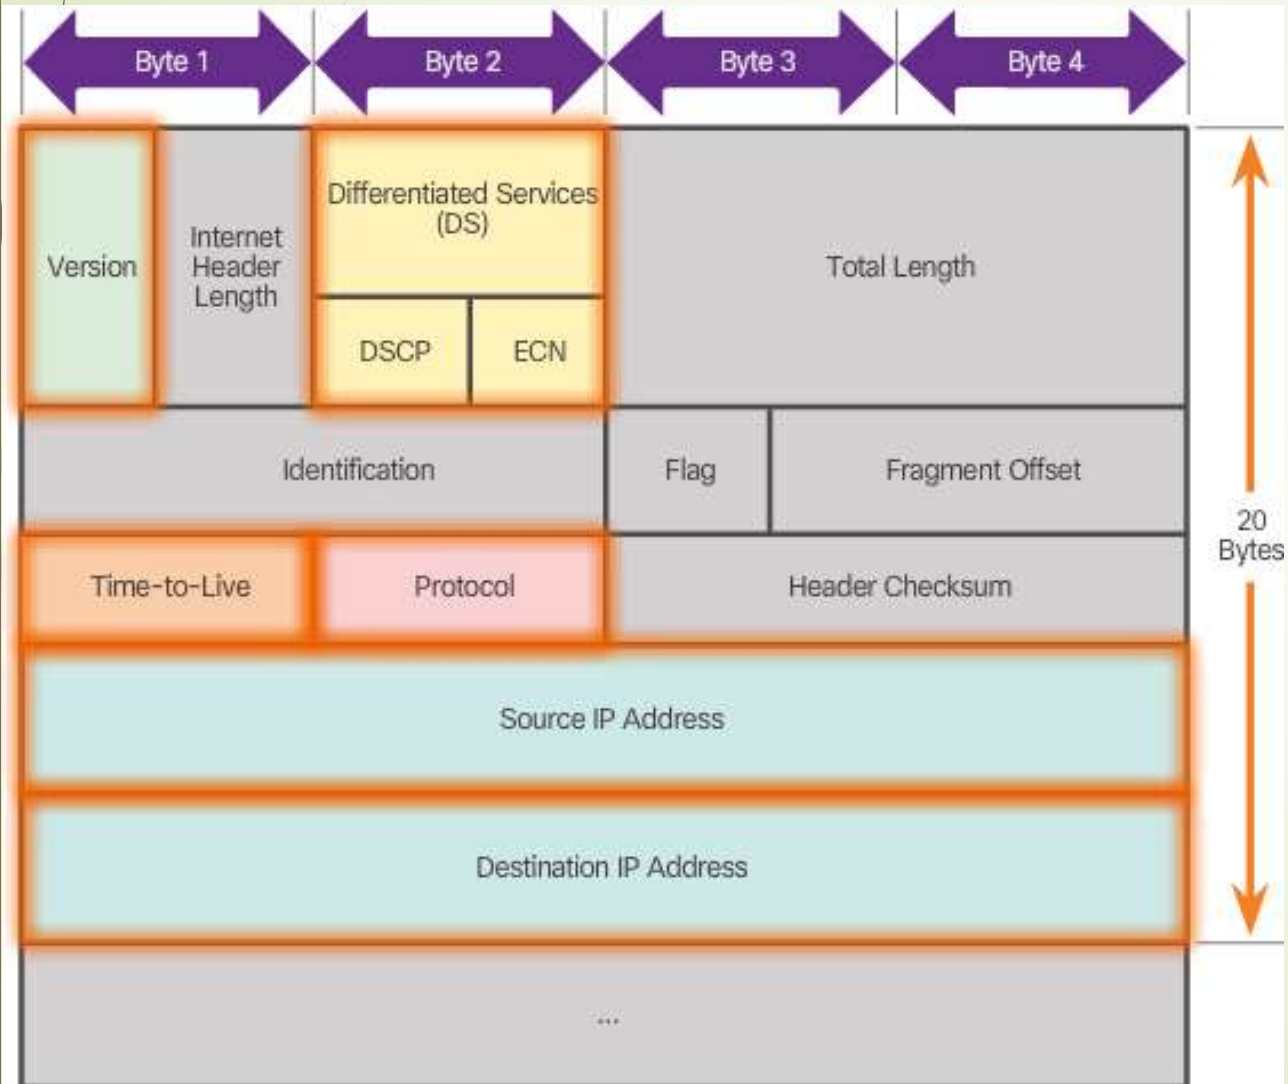

- Version = 0100
- DS = Packet Priority
- TTL = Limits life of Packet
- Protocol = Upper layer protocol such as TCP
- Source IP Address = source of packet
- Destination IP Address = destination of packet

Network Layer Protocols

IPv6 Packet


- Limitations of IPv4
 - IP address depletion
 - Internet routing table expansion
 - Lack of end-to-end connectivity
- Introducing IPv6
 - Increased address space
 - Improved packet handling
 - Eliminates the need for NAT
- Encapsulating IPv6
 - Simplified header format
 - No checksum process requirement
 - More efficient Options Header mechanism
 - Flow Label field makes it more efficient.

Network Layer Protocols

IPv6 Packet (Cont.)

IPv6 Packet Header

Fields in the IPv6 Packet Header

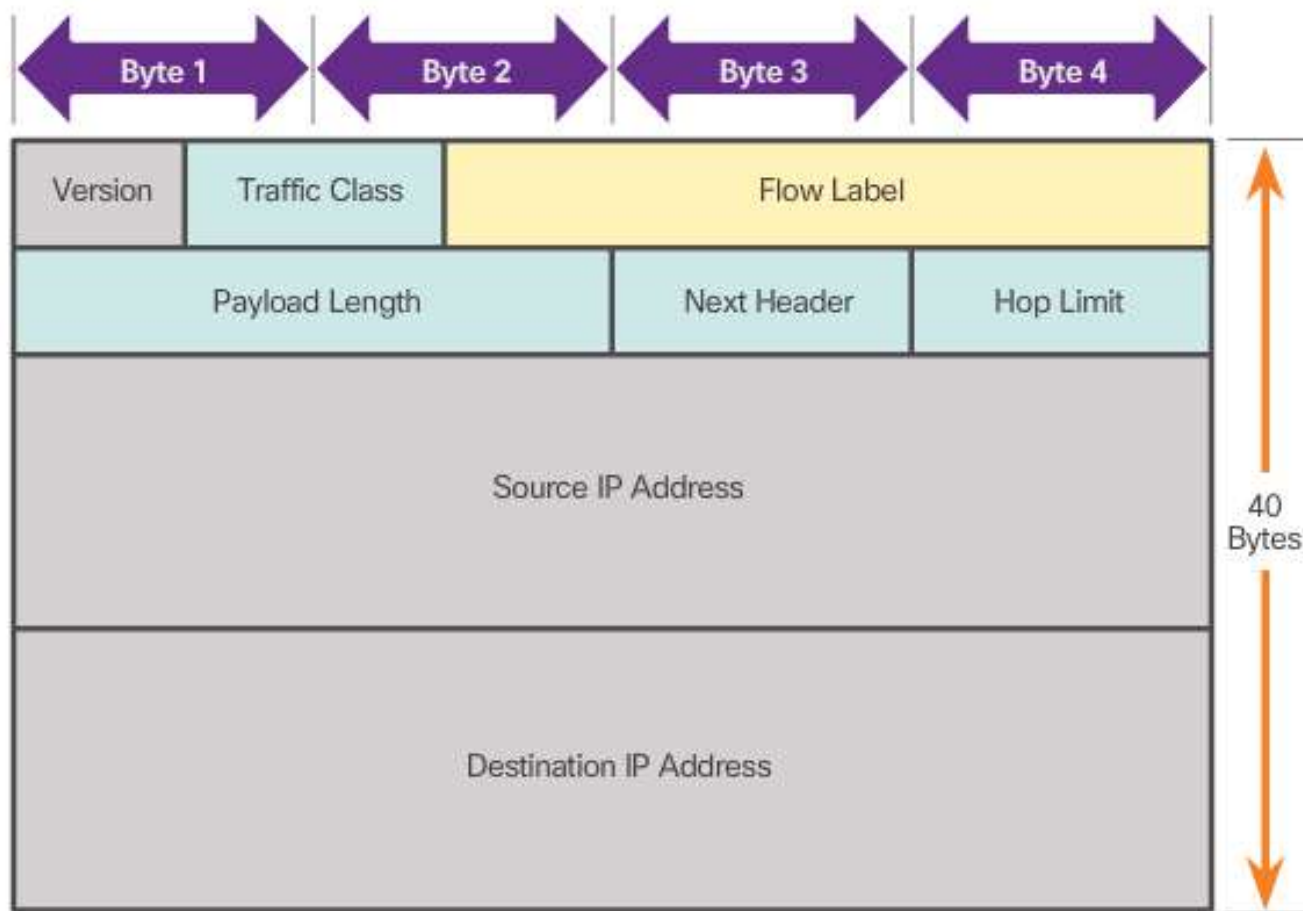


- Version = 0110
- Traffic Class = Priority
- Flow Label = same flow will receive same handling
- Payload Length = same as total length
- Next Header = Layer 4 Protocol
- Hop Limit = Replaces TTL field

Routing

How a Host Routes


- ▶ Host Forwarding Decision
 - ▶ Three types of destination: itself, local host, remote host.
- ▶ Default Gateway
 - ▶ Routes traffic to other networks
 - ▶ Has a local IP address in the same address range as other hosts on the network
 - ▶ Can take data in and forward data out
- ▶ Using the Default Gateway
 - ▶ Hosts will use the default gateway when sending packets to remote networks.
- ▶ Host Routing Tables
 - ▶ Use the **netstat -r** command to display the host routing table on a Windows machine.

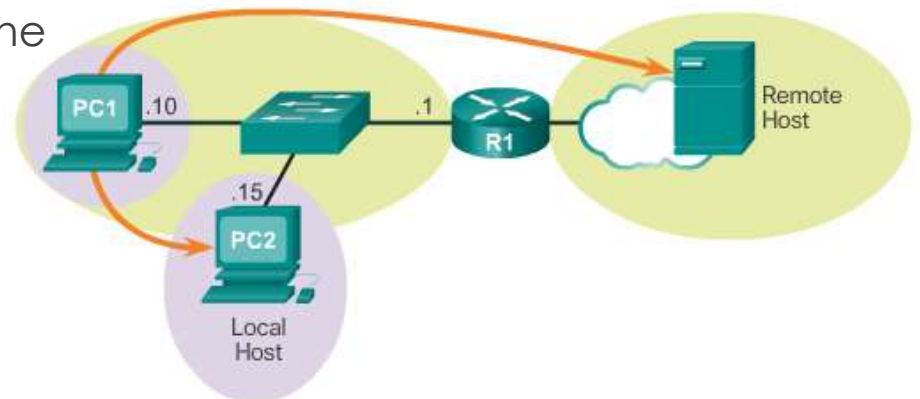

Routing

How a Host Routes (Cont.)

IPv4 Routing Table for PC1

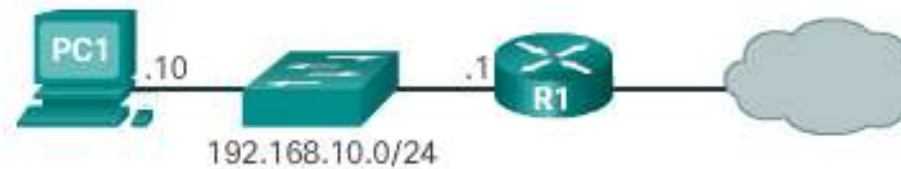

```
C:\Users\PC1>netstat -r
```

```
<output omitted>
```

IPv4 Route Table

Active Routes:

Network Destination	Netmask	Gateway	Interface	Metric
0.0.0.0	0.0.0.0	192.168.10.1	192.168.10.10	25
127.0.0.0	255.0.0.0	On-link	127.0.0.1	306
127.0.0.1	255.255.255.255	On-link	127.0.0.1	306
127.255.255.255	255.255.255.255	On-link	127.0.0.1	306
192.168.10.0	255.255.255.0	On-link	192.168.10.10	281
192.168.10.10	255.255.255.255	On-link	192.168.10.10	281
192.168.10.255	255.255.255.255	On-link	192.168.10.10	281
224.0.0.0	240.0.0.0	On-link	127.0.0.1	306
224.0.0.0	240.0.0.0	On-link	192.168.10.10	281
255.255.255.255	255.255.255.255	On-link	127.0.0.1	306
255.255.255.255	255.255.255.255	On-link	192.168.10.10	281

```
<output omitted>
```

How a Host Routes

Router Routing Tables

➤ Router Packet Forwarding Decision

- Routers and hosts forward packets in a similar fashion.
- The main difference is that routers have more interfaces while hosts often have only one.
- Devices on directly connected networks can be reached directly.
- Devices on remote networks are reached through gateway.

➤ IPv4 Router Routing Table

- The router routing table stores network routes the router knows about.
- Use the **show ip route** command to display the routing table on a Cisco router.
- The router routing table also has information on: how the route was learned, its trustworthiness and rating.
- It also contains which interface to use to reach that specific destination.

➤ Directly Connected Routing Table Entries

- C - Identifies a directly-connected network, automatically created when an interface is configured with an IP address and activated.
- L - Identifies that this is a local interface. This is the IPv4 address of the interface on the router.

➤ Remote Network Routing Table Entries

- Xx

➤ Next-Hop Address

- xx

How a Host Routes


Router Routing Tables (Cont.)

Remote Network Routing Table Entries

- Remote destinations can't be reached directly.
- Remote routes contain the address of the intermediate network device to be used to reach the destination.

Next-Hop Address

- Next-Hop address is the address of the intermediate device used to reach a specific remote destination.

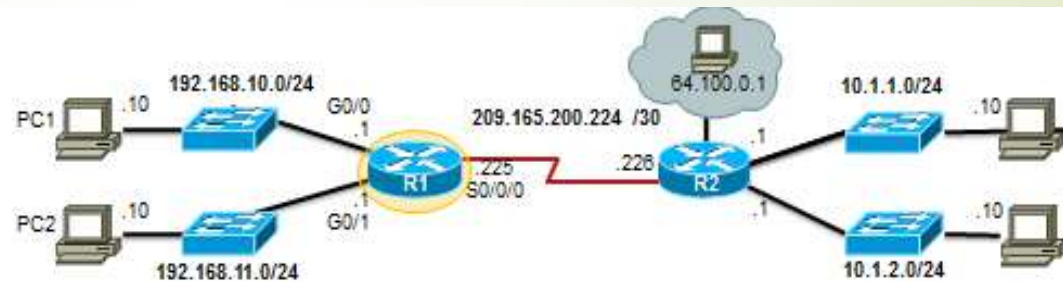

D	10.1.1.0/24	[90/2170112]	via	209.165.200.226	, 00:00:05	Serial10/0/0
---	-------------	--------------	-----	-----------------	------------	--------------

A	Identifies how the network was learned by the router.
B	Identifies the destination network.
C	Identifies the administrative distance (trustworthiness) of the route source.
D	Identifies the metric to reach the remote network.
E	Identifies the next hop IP address to reach the remote network.
F	Identifies the amount of elapsed time since the network was discovered.
G	Identifies the outgoing interface on the router to reach the destination network.

Binary and Decimal Conversion

- ▶ IPv4 Addresses
 - ▶ consists of a string of 32 bits, divided into four sections called *octets*.
 - ▶ Each octet contains 8 bits (or 1 byte) separated with a dot.
- ▶ Conversion between Binary to Decimal
 - ▶ Use the chart to help with conversion

192	.	168	.	10	.	10
11000000		10101000		00001010		00001010

192.168.10.10 is an IP address that is assigned to a computer.

Positional Value	128	64	32	16	8	4	2	1
Binary number								
Calculate	x 128	x 64	x 32	x 16	x 8	x 4	x 2	x 1
Add them up ...								
Result								

IPv4 Network Addresses

IPv4 Address Structure




- ▶ Network and Host Portions
- ▶ The Subnet Mask
- ▶ Logical AND
 - ▶ What is the network address for graphics?
- ▶ Prefix Length
 - ▶ What is the prefix length for the graphics?
- ▶ Network, Host, and Broadcast Addresses
 - ▶ Network Address?
 - ▶ Range of Valid Hosts?
 - ▶ Broadcast Address?

	Network Portion			Host Portion
IPv4 Address	192	. 168	. 10	10
	11000000	10101000	00001010	00001010
Subnet Mask	255	. 255	. 255	0
	11111111	11111111	11111111	00000000

IPv4 Network Addresses

IPv4 Unicast, Broadcast, and Multicast

- ▶ IPv4 Addressing Assignment to a Host
 - ▶ Static – Type in manually
 - ▶ Dynamic - Dynamic Host Configuration Protocol (DHCP)
- ▶ IPv4 Communication
 - ▶ Unicast - send packets from one host to an individual host
 - ▶ Broadcast - send packets from one host to all the hosts in the network
 - ▶ Multicast - send a packet from one host to a selected group of hosts in the same or different network
- ▶ Which types of communication are the graphics on the right?

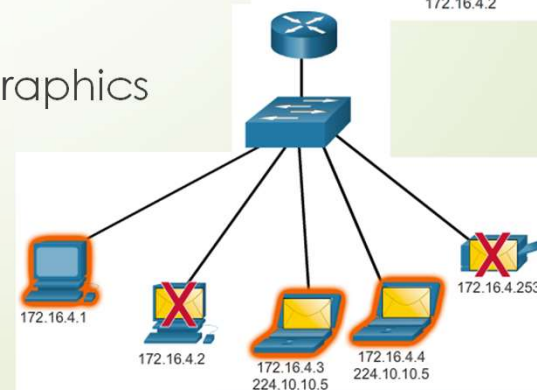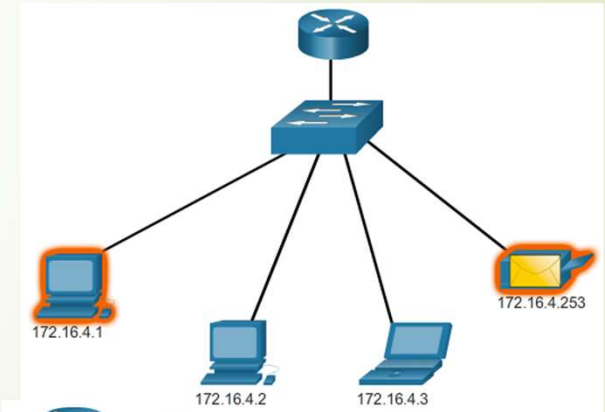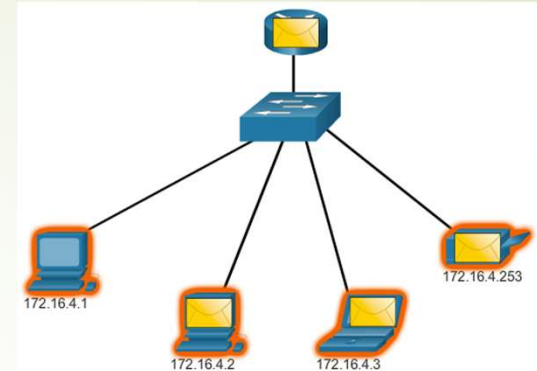


IPv4 Network Addresses

Types of IPv4 Addresses

Public and Private IPv4 Addresses

- Private addresses are not routed over the Internet
- Private Addresses:
 - 10.0.0.0/8 or 10.0.0.0 to 10.255.255.255
 - 172.16.0.0 /12 or 172.16.0.0 to 172.31.255.255
 - 192.168.0.0 /16 or 192.168.0.0 to 192.168.255.255

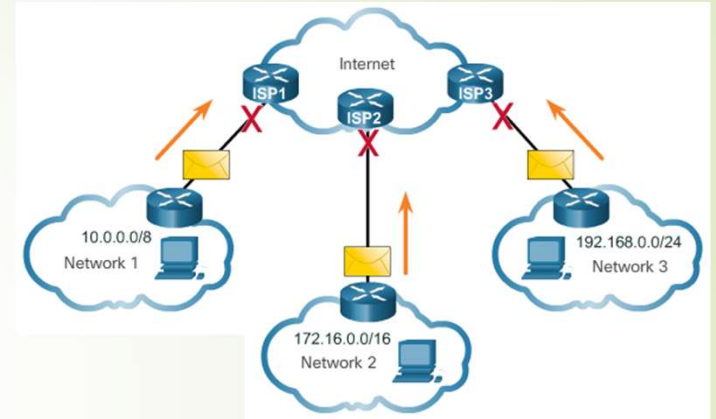

Special User IPv4 Addresses

- Loopback addresses
 - 127.0.0.0 /8 or 127.0.0.1 to 127.255.255.254
- Link-Local addresses or Automatic Private IP Addressing (APIPA) addresses
 - 169.254.0.0 /16 or 169.254.0.1 to 169.254.255.254
- TEST-NET addresses
 - 192.0.2.0/24 or 192.0.2.0 to 192.0.2.255

Classless Addressing

- CIDR
- Allocated IPv4 addresses based on prefix length




Assignment of IP Addresses



IPv6 Network Addresses

IPv4 Issues

- The Need for IPv6
 - Depletion of IPv4 address space
 - Internet of Everything
- IPv4 and IPv6 Coexistence
 - Dual Stack – IPv4 and IPv6 on the same network
 - Tunneling – IPv6 packets inside IPv4 packets
 - Translation - IPv6 packet is translated to an IPv4 packet, and vice versa.

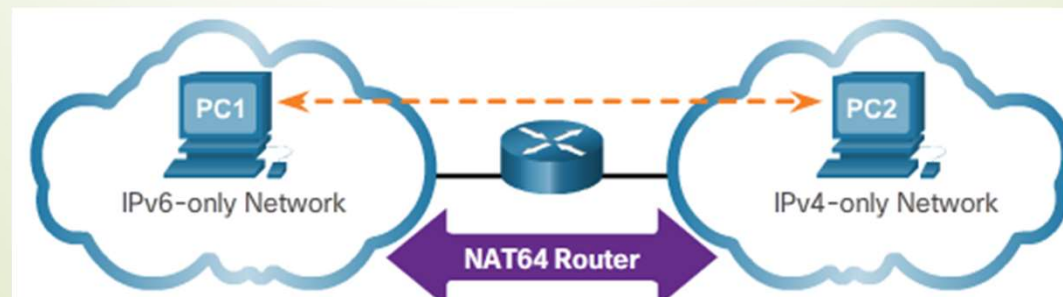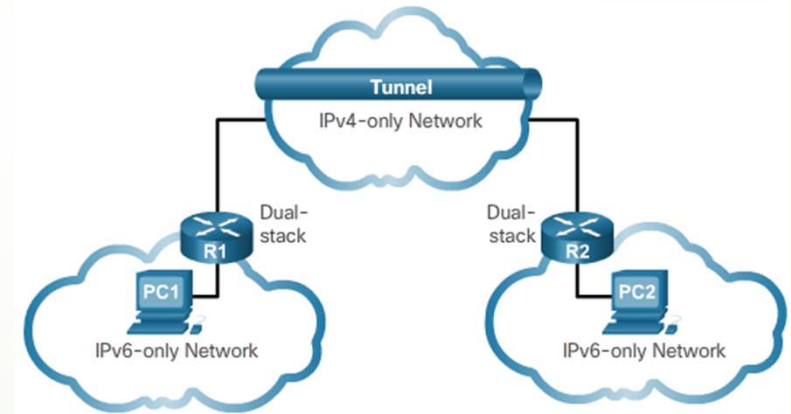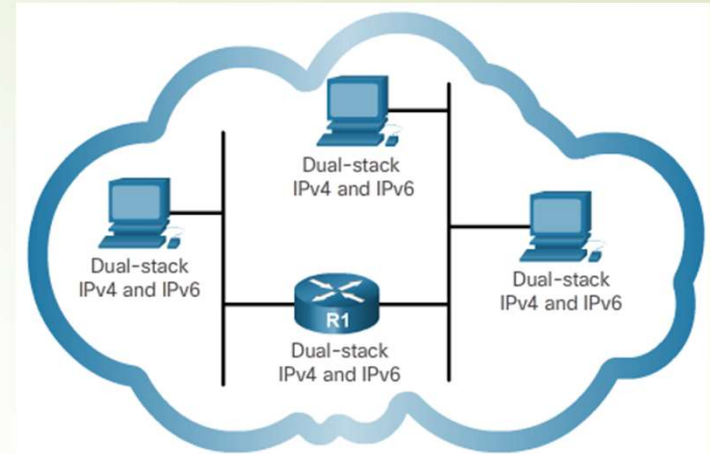

IPv6 Network Addresses

IPv6 Addressing

IPv6 Address Representation

- x:x:x:x:x:x:x, where x represents 4 hexadecimal values

Apply the rules to simplify these IPv6 Addresses

- Rule 1: Omit Leading 0s
- Rule 2: Omit All 0 Segments

- 2001:0DB8:0000:1133:0000:0000:0000:0200
- 2001:0DB8:CAFE:0000:1111:0000:0000:0200
- 2001:0DB8:000A:0000:0000:0000:0000:1000
- 2001:0DB8:ACAD:1234:0000:0000:0000:0000
- 2001:0DB8:0000:1111:0020:0000:ACAD:0000
- FF02:0000:0000:0000:0000:0000:0000:0001
- FE80:0000:0000:0000:0000:0000:0000:0003
- 0000:0000:0000:0000:0000:0000:0000:0000

X	:	X	:	X	:	X	:	X	:	X	:	X	:	X
0000	:	0000	:	0000	:	0000	:	0000	:	0000	:	0000	:	0000
to	:	to	:	to	:	to	:	to	:	to	:	to	:	to
FFFF	:	FFFF	:	FFFF	:	FFFF	:	FFFF	:	FFFF	:	FFFF	:	FFFF

4 hexadecimal digits = 16 binary digits

0000	:	0000	:	0000	:	0000
to	:	to	:	to	:	to
1111	:	1111	:	1111	:	1111

IPv6 Network Addresses

Types of IPv6 Addresses

IPv6 Address Types



- Unicast
- Multicast
- Anycast

IPv6 Prefix Length

- Indicates the network portion
- Format: IPv6 address /prefix length
- Prefix length range from 0 to 128
- Typical length is /64

Common Types of IPv6 Addresses


- Unicast Addresses
 - Unique, Internet routable addresses
 - Configured statically or assigned dynamically
 - Link-Local Unicast Addresses
 - Communicate with other IPv6 enabled devices on the same link
 - Device creates its own link local address without DHCP server
 - Unique Local Addresses
 - Unique local unicast
 - Used for local addresses within a site or between a limited number of sites

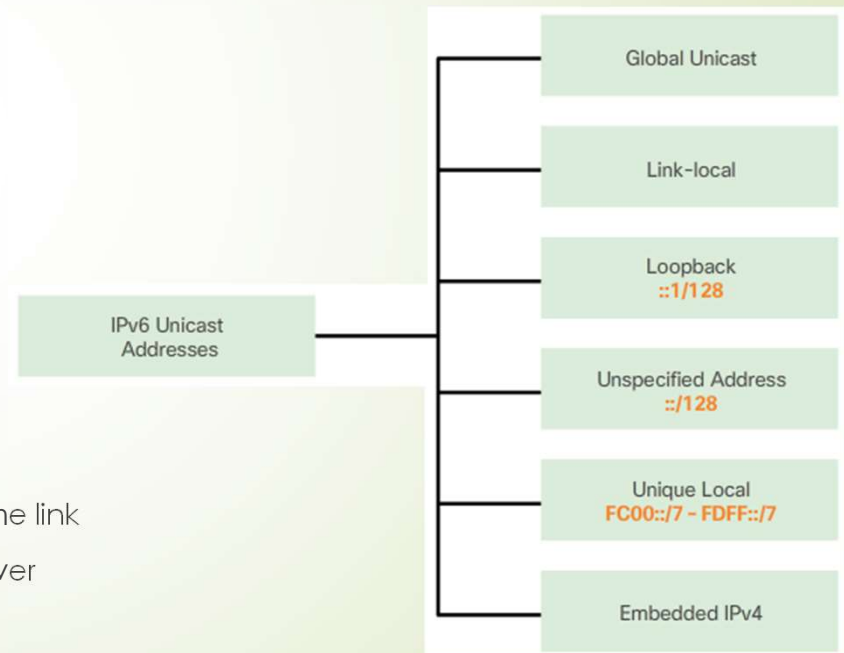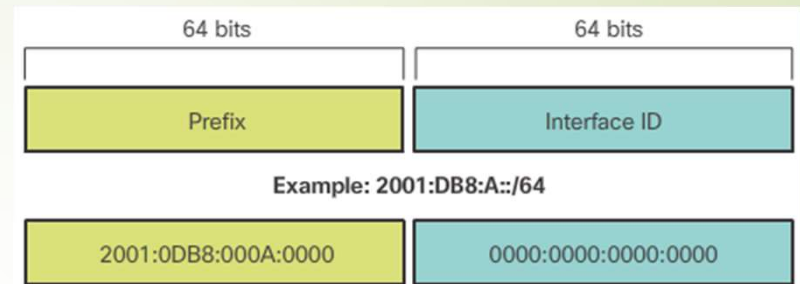


IPv6 Network Addresses

IPv6 Unicast Addresses

- Structure of an IPv6 Global Unicast Address
 - Global Routing Prefix
 - Subnet ID
 - Interface ID
- Static Configuration of a Global Unicast Address
 - ipv6 address** *ipv6-address/prefix-length*
- Dynamic Configuration
 - SLAAC
 - DHCPv6
- Link-Local Addresses
 - Dynamic or Static
- Verifying IPv6 Address Configuration
 - show ipv6 interface brief

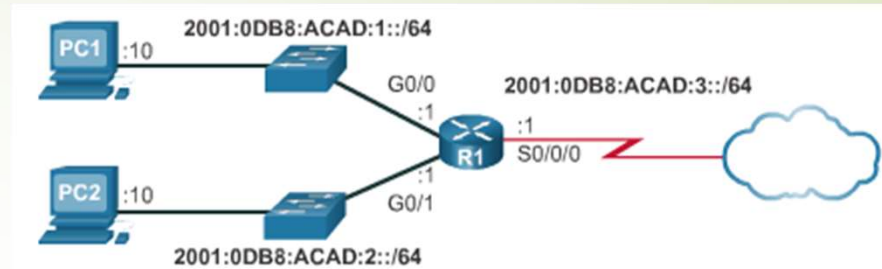



```
R1 (config)#interface gigabitethernet 0/0
R1 (config-if)#ipv6 address 2001:db8:acad:1::1/64
R1 (config-if)#no shutdown
R1 (config-if)#exit
R1 (config)#interface gigabitethernet 0/1
R1 (config-if)#ipv6 address 2001:db8:acad:2::1/64
R1 (config-if)#no shutdown
R1 (config-if)#exit
R1 (config)#interface serial 0/0/0
R1 (config-if)#ipv6 address 2001:db8:acad:3::1/64
R1 (config-if)#clock rate 56000
R1 (config-if)#no shutdown
```

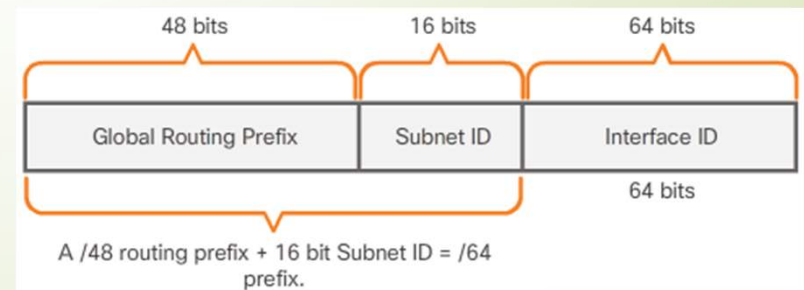

IPv6 Network Addresses

IPv6 Multicast Addresses

- Assigned IPv6 Multicast Addresses
 - IPv6 multicast addresses have the prefix FF00::/8
 - FF02::1 All-nodes multicast group
 - FF02::2 All-routers multicast group
- Solicited-Node IPv6 Multicast Addresses

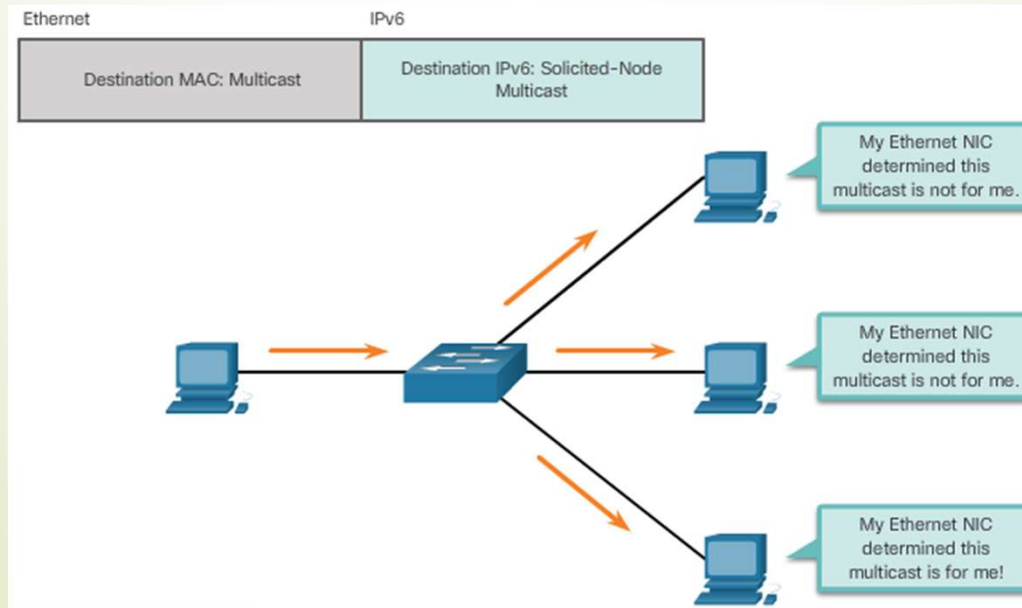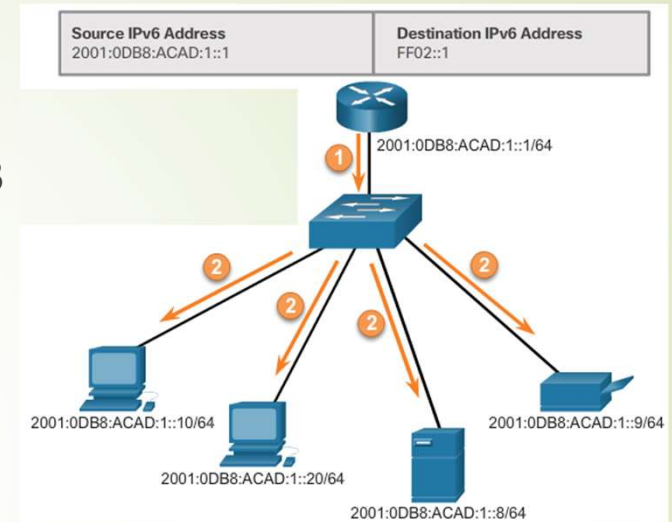

Connectivity Verification

ICMP

- ▶ ICMPv4 and ICMPv6
 - ▶ Host Confirmation
 - ▶ Destination or Service Unreachable
 - ▶ Time Exceeded
 - ▶ Router Redirection
- ▶ ICMPv6 Router Solicitation and Router Advertisement Messages
 - ▶ Messaging between an IPv6 router and an IPv6 device:
 - ▶ Router Solicitation (RS) message
 - ▶ Router Advertisement (RA) message
 - ▶ Messaging between IPv6 devices:
 - ▶ Neighbor Solicitation (NS) message
 - ▶ Neighbor Advertisement (NA) message
 - ▶ Duplicate Address Detection (DAD)

